


3 COURSE MAX.

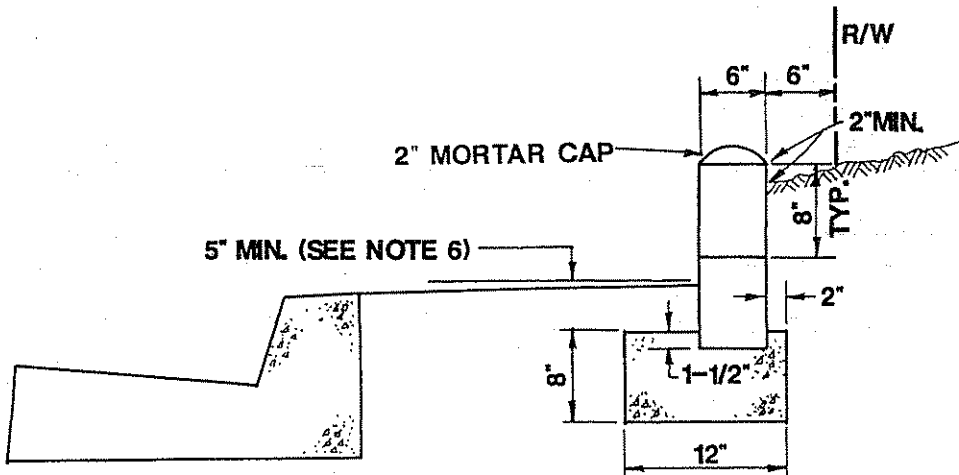

2 COURSE MAX.

NOTES:

1. ALL CELLS TO BE FILLED SOLID WITH GROUT AND RODDED.
2. OMIT MORTAR FROM VERTICAL JOINTS IN FIRST COURSE ABOVE FINISHED GRADE ON 32" CENTERS FOR WEEP HOLES.
3. POUR FOOTING AGAINST UNDISTURBED NATURAL SOIL.
4. NO LIVE LOAD SURCHARGE ALLOWED ON FILL.
5. FOOTING TO BE CONSTRUCTED OF PORTLAND CEMENT CONCRETE.
6. TOP OF FOOTING MAY BE PLACED PARALLEL TO PARKWAY GRADE IF STREET GRADE IS RELATIVELY FLAT AND UNIFORM.

CITY OF CARSON

REVISIONS	CONCRETE BLOCK SLOUGH WALL	DRAWN BY <i>[Signature]</i>
		DATE APPROVED 2/2/87
	RECOMMENDED: <i>[Signature]</i> APPROVED: <i>[Signature]</i>	NO. 130
	DIVISION ENGINEER DIRECTOR OF PUBLIC WORKS	

103619